


Installation Guide

Omnidirectional Ceiling Mount Antenna

Instructions

1. Prepare the ceiling by drilling an 18mm diameter hole in the ceiling panel.
2. Remove the nut plate then feed the coax lead through the hole in the ceiling panel then through the mounting nut as shown above. Secure the antenna by tightening the nut plate.
3. Ensure the coax led connector is properly connected to the feeder connector going to the device for excellent contact. Apply weather proofing materials if necessary to preserve the connection integrity.

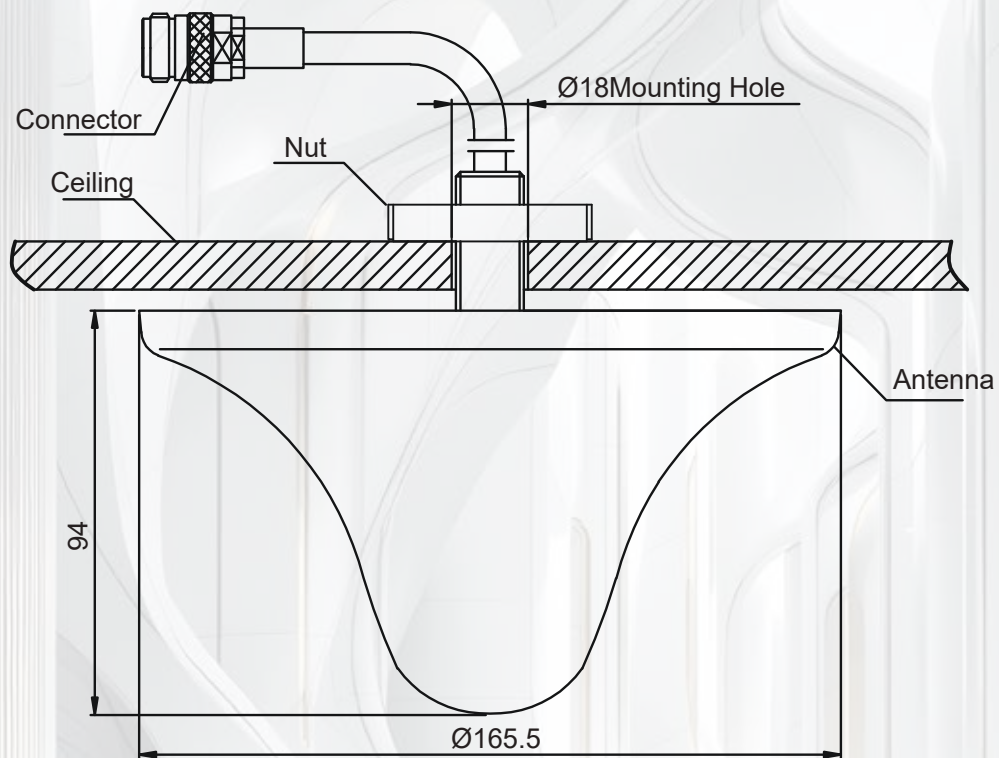

Maintenance & Safety

- Periodically inspect cable connections for corrosion or looseness.
- Keep the installation environment free from excessive moisture, dust, and vibration.
- Disconnect the system before performing maintenance.
- Use only approved accessories and Lamatel-compatible coaxial cables for optimal performance.

